



Autorisierter Fachhandelspartner:  
Pulch + Lorenz GmbH  
Am Untergrün 23  
D - 79232 March - Buchheim  
[www.pulchlorenz.de](http://www.pulchlorenz.de)  
Fax: 07665 9272 - 20  
Tel: 07665 9272 - 0



Product Information  
Version 1.0

## **ZEISS Axiocam 503 color**

Your 3 Megapixel Microscope Camera for Fast Image Acquisition  
Fast, in True Color and Regular Field of View



We make it visible.

# Technical Specifications

› **Technology and Details**

› Service

ZEISS Axiocam 503 color

<b>Sensor Model</b>	Sony ICX 674, EXview HAD CCD II™ Progressive Scan Quad-Port Readout Selected sensor quality
<b>Sensor Pixel Count</b>	2.83 Megapixel: 1936 (H) x 1460 (V)
<b>Pixel Size</b>	4.54 µm x 4.54 µm
<b>Sensor Size</b>	Image diagonal 11 mm, equivalent to 2/3" sensor format
<b>Spectral Sensitivity</b>	Approx. 400 nm – 720 nm, coated BG 40 IR Cut Filter, RGB Bayer color filter mask
<b>Max Full Well Capacity (typical)</b>	15.000 e- per pixel
<b>Signal Amplification</b>	Adjustable analog amplification 1x, 2x, 3x
<b>Digitization</b>	14 Bit / Pixel
<b>Read Out Speed</b>	39 Mhz, 13 Mhz, switchable readout clock speed
<b>Readout Noise (typical)</b>	6.5 e- at 39 Mhz 6.0 e- at 13 Mhz
<b>Dynamic Range (typical)</b>	1:2500 (68 dB)
<b>Dark Current (typical)</b>	< 0,06 e-/p/s at 18 °C sensor temperature
<b>Cooling</b>	Regulated thermoelectric cooling (power supplied through USB 3.0 and USB 2.0 ports) Delta-T 20 °C, sensor temperature 18 °C
<b>Dark Current Compensation</b>	Digital Dark Current Compensation for optimum low light performance at long exposure times Automatic Hot Pixel Correction
<b>Exposure Time Range</b>	250 µs to 60 s

# Technical Specifications

› **Technology and Details**

› Service

Binning Modes and Frame Rates	Binning	Pixel Count (H x V)	Mode	FPS @ 1 ms
	1x1	1936 x 1460	Color/Mono	38
	2x2	968 x 728	Mono	61
	3x3	640 x 484	Color/Mono	76
	4x4	480 x 364	Mono	87
	5x5	384 x 292	Color/Mono	93
	ROI	1936 x 1080	Color/Mono	45
	ROI	1936 x 512	Color/Mono	69
(exposure time < readout time)				
<b>Color Interpolation Modes</b>	High Speed: optimum speed color interpolation			
	High Quality: optimum quality color interpolation			
Live Frame Rates	Max. Frame Rate	Binning factor/Mode	Resolution/Pixel	
Max. Ratings at optimum settings;	38 frames/s	1/slow	1936 x 1460	
Hardware and Color Enhancements Off	76 frames/s	3/medium	640 x 484	
	93 frames/s	5/fast	384 x 292	
<b>Data-Post Processing (optional)</b>	Lens specific shading correction			
	Sharpening, noise filter, color enhancement			
	Black reference, dark current compensation			
<b>Special Features</b>	Time stamp from camera for precise acquisition timing			
	Auto Switch Mode for Single Port / Dual Port / Quad Port Readout			
	Adjustable intensity of status LED			
<b>Special Preset Modes</b>	Eight pre-loadable sets of imaging parameters for speed-optimized multi-modal image acquisition			
	Overlapping exposure and readout for fast time lapse imaging			

# Technical Specifications

› **Technology and Details**

› Service

<b>Switchable Sensor Output Amplifier</b>	Single Port Readout mode for long exposure times for maximum signal quality
	Dual Port and Quad Port Readout Mode for improved readout speed at full resolution
	Automatic port activation mode or full manual mode
<b>Region of Interest (ROI)</b>	User defined imaging sub area for improvement of readout speed and reduction of amount of data
<b>Hardware Trigger</b>	Galvanically isolated I/O-signals
	Three output signals: exposure time, readout time, trigger ready, i.e. for controlling external mechanical shutters
	One trigger input for exposure control, 5V auxiliary voltage, GND
<b>Status LED</b>	Top LED: camera status (acquisition, power, cooling, speed)
	Back LED: trigger status
<b>Interface</b>	USB 3.0 SuperSpeed (5 Gbit/s)
	Bandwidth max. 240 MB/s
	USB 2.0 optional, with lower speed
<b>Optical Interface</b>	C-Mount (17.5 mm)
<b>Max. File Size per Image</b>	Approx. 17 MB per image with 1936x1460 Pixels at 3 x 14 Bit/Pixel
<b>Operating Systems</b>	Microsoft® Windows 7 Ultimate, Enterprise and higher
<b>Size (W x H x D) / Weight</b>	10.8 cm x 4.3 cm x 7.8 cm / 500 g
<b>Housing</b>	Blue anodized aluminum
	¼" standard camera mount screw thread
	Zero Vibration by convection-cooling, optimized cooling fins
	Teflon coated C-mount thread
<b>Certificates</b>	CE
<b>Power Supply</b>	Max. 7W power consumption, powered by USB 2.0 and USB 3.0-Bus from PC
	For maximum performance connection to both USB 3.0 and USB 2.0 required (dual connection cabling provided with camera)

# Technical Specifications

› **Technology and Details**

› Service


Ambient Conditions (Operation)	+5 °C ... +35 °C
	Max. 80% relative humidity, non-condensing
	Free air circulation required
Ambient Conditions (Storage)	-15 °C ... +60 °C
	90% relative humidity at +40 °C, 80% relative humidity at +20 °C, non-condensing
Order Number	426558-0000-000

*All frame rates are maximum values at short exposure times below readout time of the sensor. Exposure time, computer hardware operating system and software can reduce the maximum achievable frame rates. By using binning or sensor sub regions (ROI), the frame rates can be further increased. Technical data is subject to changes due to technical progress.*

# Technical Specifications

› Technology and Details

› Service

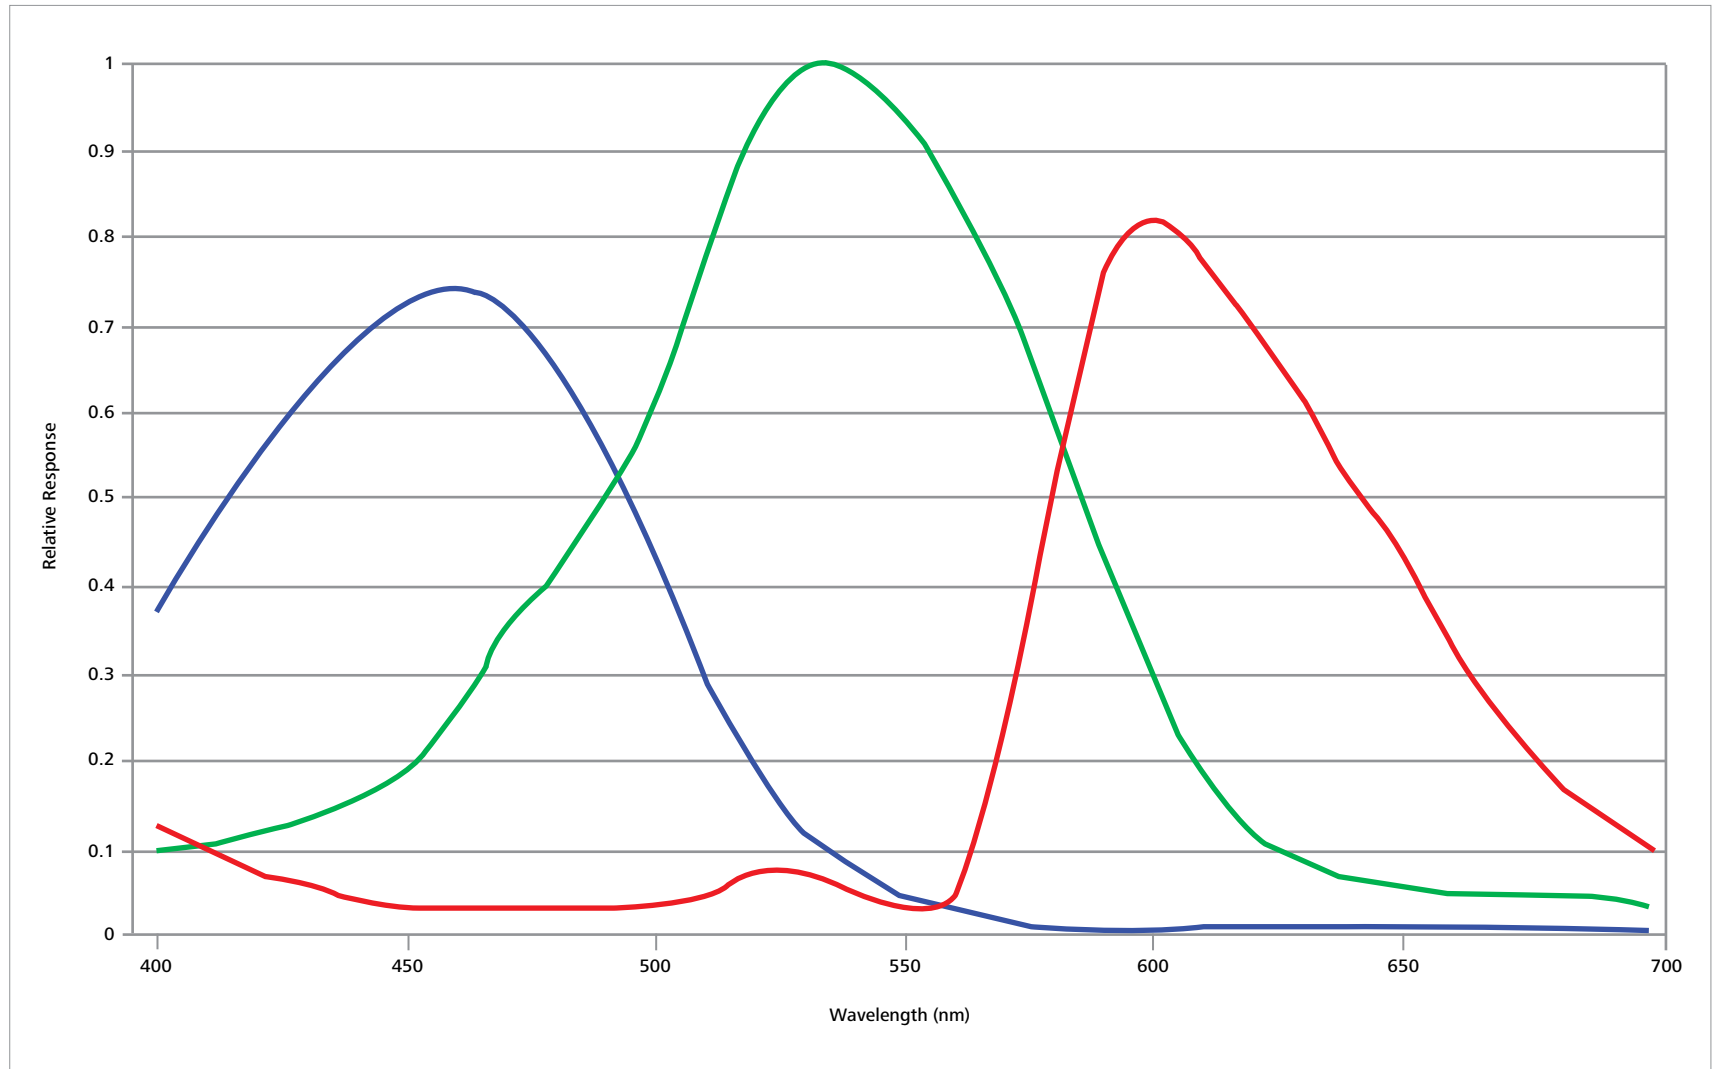

## Count on Service in the True Sense of the Word

› Technology and Details

› **Service**

Because the ZEISS microscope system is one of your most important tools, we make sure it is always ready to perform. What's more, we'll see to it that you are employing all the options that get the best from your microscope. You can choose from a range of service products, each delivered by highly qualified ZEISS specialists who will support you long beyond the purchase of your system. Our aim is to enable you to experience those special moments that inspire your work.

### **Repair. Maintain. Optimize.**

Attain maximum uptime with your microscope. A ZEISS Protect Service Agreement lets you budget for operating costs, all the while reducing costly downtime and achieving the best results through the improved performance of your system. Choose from service agreements designed to give you a range of options and control levels. We'll work with you to select the service program that addresses your system needs and usage requirements, in line with your organization's standard practices.

Our service on-demand also brings you distinct advantages. ZEISS service staff will analyze issues at hand and resolve it – whether using remote maintenance software or working on site.

### **Enhance Your Microscope System.**

Your ZEISS microscope system is designed for a variety of updates: open interfaces allow you to maintain a high technological level at all times. As a result you'll work more efficiently now, while extending the productive lifetime of your microscope as new update possibilities come on stream.

Please note that our service products are always being adjusted to meet market needs and maybe be subject to change.



*Profit from the optimized performance of your microscope system with services from ZEISS – now and for years to come.*

>> [www.zeiss.com/microservice](http://www.zeiss.com/microservice)



**Carl Zeiss Microscopy GmbH**  
07745 Jena, Germany  
BioSciences & Materials  
microscopy@zeiss.com  
www.zeiss.com/axiocam



Autorisierter Fachhandelspartner:  
Pulch + Lorenz GmbH  
Am Untergrün 23  
D - 79232 March - Buchheim  
www.pulchlorenz.de  
Fax: 07665 9272 - 20  
Tel: 07665 9272 - 0



We make it visible.